

## Dew Point Testers

Bureau of Mines-Type Dew Point Tester from AMETEK

### Features

- ▶ Meets ASTM D1142
- ▶ Portable and rugged for repeatable results
- ▶ No calibration needed
- ▶ RTD traceable to NIST (Chanscope II)
- ▶ Easy to maintain and use

### Applications

- ▶ **Natural Gas**  
Designed for accuracy in the rugged environment typically found in the gas industry. A special model is available for offshore use.
- ▶ **Sour Gas**  
Corrosion-resistant materials are used for H<sub>2</sub>S atmospheres.
- ▶ **Industrial Gases**  
The tester is ideally suited for the measurement of the dew point of pressurized N<sub>2</sub>, O<sub>2</sub>, H<sub>2</sub>, Ar, air, and other bottled gases.
- ▶ **Heat Treating Furnaces**  
Chandler instruments are easy to use and produce reliable, accurate answers. They have been used for years in this application.


### Bureau of Mines Model

The Chandler Bureau of Mines Dew Point Tester is a primary instrument used to measure the dew point temperature of any gas. It is rugged, portable, and can provide very repeatable results. Because of its primary nature, the standard dew point tester requires no calibration. Consequently, it is frequently used to verify results of electronic instruments.

The Chandler Dew Point Tester is a chilled mirror device that operates by achieving the conditions required by the definition of dew point. When a gas is cooled out of contact with liquid water, the humidity or water content remains constant, but the percentage of saturation increases until it reaches 100% and moisture begins to condense. The temperature at this point is known as the dew point or frost point.

### Operation

The Chandler "Bureau of Mines-type" Dew Point Tester consists of a small high pressure chamber through which the gas sample flows. A polished mirror is at one end of the chamber and a viewing window at the other. The operator controls an expandable gas through a valve, cooling the polished mirror until the dew point is observed. The observed dew point temperature and pressure may be entered into the moisture content software supplied with the dew point tester to calculate the water content of the sample. Hydrocarbon dew points in natural gas can be obtained using the same method.

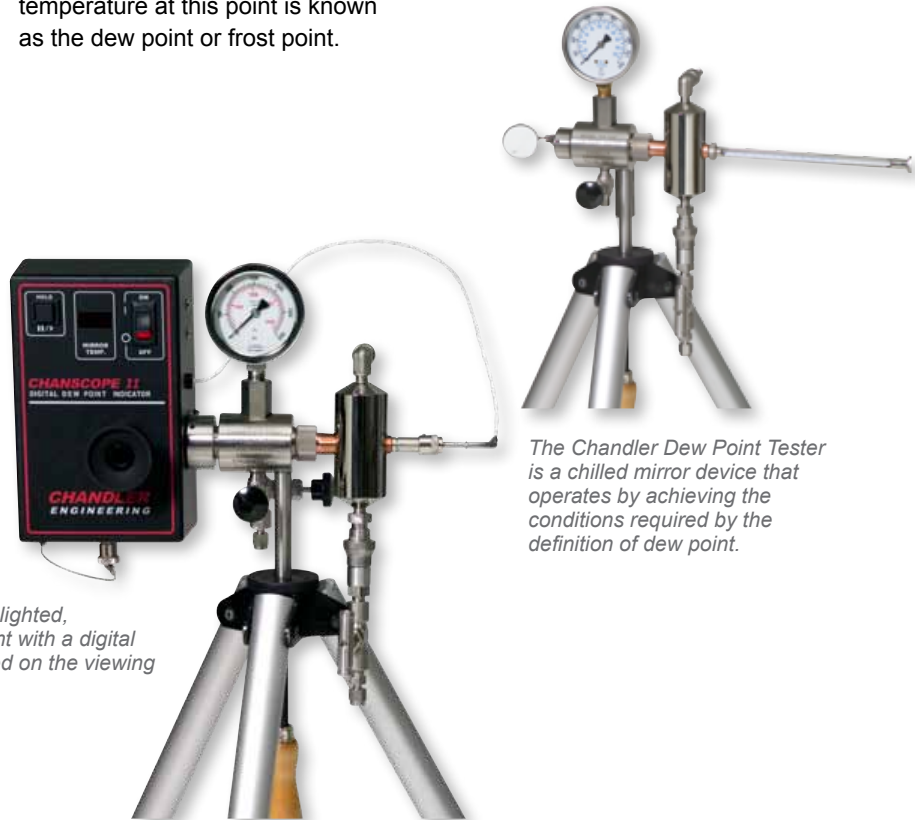

*The Chanscope II version allows lighted, magnified viewing of the dew point with a digital temperature display superimposed on the viewing window in tenths of degree.*

*The Chandler Dew Point Tester is a chilled mirror device that operates by achieving the conditions required by the definition of dew point.*

# Dew Point Testers

## Specifications

### *Chanscope II Dew Point Tester*

#### Accuracy:

±0.2°C (±0.4°F) at 40°C (104°F) to -90°C (-130°F)

(NIST Certification Included)

#### Dew Point Temperature Range:

-129°C (-200°F) to ambient

**Operating Pressure:** Up to 5000 psig (34.6 MPa)

**Connections:** Sample inlet and outlet: 1/8" NPT; Refrigerant, 1/8" tube

**Power:** Battery-powered (NiMH), 100-240VAC, 50/60 Hz, smart charger.

**Ship Weight:** 25 lb (11 kg)

**Carrying Case:** 14" x 18" x 7" (35.5cm x 45.7cm x 17.8cm), water-tight, form-fitted resin case

### *Standard Dew Point Tester*

**Accuracy:** ± 0.5°F (± 0.25°C)

#### Dew Point Temperature Range:

Dependant on which thermometer is chosen.

**Operating Pressure:** Up to 5000 psig (34.6 MPa)

**Connections:** Sample inlet and outlet: 1/8" NPT; Refrigerant, 1/8" tube

**Ship Weight:** 25 lb (11 kg)

**Carrying Case:** 14" x 18" x 7" (35.5cm x 45.7cm x 17.8cm)

## Options

### ▶ Digital Readout

The Chanscope II version allows lighted, magnified viewing of the dew point with a digital temperature display superimposed on the viewing window in tenths of degree. The unit also has a button-hold feature to retain the measured value. The model uses accurate platinum RTD and LED readout to give the operator instantaneous feedback during a test.

### ▶ Pressure Range

Models are available in ranges of 1,000, 3,000 or 5,000 psig (7.0, 20.8, and 34.6 MPa).

### ▶ Regular Chiller

Uses liquid propane: -29°C (-20°F) or liquid carbon dioxide -62°C (-80°F) as a refrigerant. Its geometry optimizes thermal uniformity for superior control and accurate determination.

### ▶ Quick Chiller

Uses the same expandable gases but directs them onto the back of the polished mirror. Fast reaction time is achieved, but there is an increased risk of overshooting the dew point until all components reach thermal equilibrium.

### ▶ Liquid Nitrogen Chiller

Uses an immersion rod and Dewar flask containing N<sub>2</sub> for temperatures down to -129°C (-200°F).

### ▶ Thermometers

A wide range of thermometers are available in Centigrade or Fahrenheit, including certified RTD traceable to NIST. Thermometers are filled with a biodegradable liquid, eliminating the safety concerns of mercury.

**AMETEK**  
PROCESS INSTRUMENTS

150 Freeport Road, Pittsburgh, PA 15238  
Ph. +1-412-828-9040, Fax +1-412-826-0399  
[www.ametekpi.com](http://www.ametekpi.com)



© 2010, by AMETEK, Inc.  
All rights reserved. Printed in the U.S.A.  
F-0168 Rev 4 (1210)

One of a family of innovative process analyzer solutions from AMETEK Process Instruments.  
Specifications subject to change without notice.

#### SALES AND MANUFACTURING:

**USA - Delaware**  
455 Corporate Blvd., Newark DE 19702 • Tel: +1-302-456-4400, Fax: +1-302-456-4444

**USA - Oklahoma**  
2001 N. Indianwood Ave., Broken Arrow OK 74012 • Tel: +1-918-250-7200, Fax: +1-918-459-0165

**CANADA - Alberta**  
2876 Sunridge Way N.E., Calgary, AB T1Y 7H9 • Tel: +1-403-235-8400, Fax: +1-403-248-3550

#### WORLDWIDE SALES AND SERVICE LOCATIONS:

**USA - Texas**  
Tel: +1-713-466-4900, Fax: +1-713-849-1924

**CHINA**  
Beijing / Tel: 86 10 8526 2111, Fax: 86 10 8526 2141  
Chengdu / Tel: 86 28 8675 8111, Fax: 86 28 8675 8141  
Guangzhou / Tel: 86 20 8363 4768, Fax: 86 20 8363 3701  
Shanghai / Tel: 86 21 5868 5111, Fax: 86 21 5866 0969

**FRANCE**  
Tel: 33 1 30 68 89 20, Fax: 33 1 30 68 89 29

**GERMANY**  
Tel: 49 21 59 91 36 0, Fax: 49 21 59 91 3639

**INDIA**  
Tel: 91 80 6782 3200, Fax: 91 80 6782 3232

**SINGAPORE**  
Tel: 65 6484 2388, Fax: 65 6481 6588