

## CG1000 Oxygen Analyzer

Quickly responds to net oxygen changes from 0.1 ppm to 100% O<sub>2</sub>



The CG1000 is a portable oxygen analyzer designed for industrial and laboratory applications. It has a wide operating range (0.1 ppm to 100% O<sub>2</sub>, autoranging), a fast response to oxygen changes, and advanced electronic capabilities for easy system integration.

### APPLICATIONS

- || Cryogenic gas generating systems
- || Nitrogen purity systems
- || Blanket gas analysis
- || Inert gas purity
- || Air separation
- || Atmospheric oven control
- || Glove box applications
- || Semiconductor manufacturing processes

### FEATURES

- || Lightweight, compact case with handle makes it easy to move the analyzer to different sampling locations.
- || User-friendly, menu-driven software includes helpful system status messages, allowing you to begin using the CG1000 quickly. Advanced software diagnostics and on-line help simplify operations.
- || Electronic flow sensor eliminates the high maintenance and potential leaks associated with mechanical flow meters. This allows you to reliably monitor the flow of gases into the analyzer, and can even trigger a flow alarm if flow to the analyzer stops.
- || Optional built-in pump allows you to pull samples from processes under vacuum and compensate for pressure when measuring oxygen under vacuum. Simply press a key on the front panel display to turn the pump on.
- || Reduce calibration gas expenses by calibrating with percent gases and then reading accurately in low PPM ranges.
- || Easy to integrate into your overall control scheme using RS-485 serial communications, 0 - 20/4 - 20 mA current outputs, and digital alarms.
- || The zirconium oxide sensor will not fail to a zero oxygen reading, as with other sensor technologies. Therefore, your process is always protected.

# CG1000 Oxygen Analyzer

## PERFORMANCE SPECIFICATIONS

**Operating Range:** 0.1 ppm O<sub>2</sub> to 100% O<sub>2</sub>

**Accuracy:** ± 2% of reading or .05% O<sub>2</sub> absolute (0.5 PPM O<sub>2</sub> absolute for PPM range), whichever is greater

**Response Time:** Less than 5 seconds at 150 sccm over one decade

**Repeatability:** ± 0.5% of reading or 0.1% O<sub>2</sub> absolute (0.1 PPM O<sub>2</sub> absolute for PPM range), whichever is greater

### Environment:

*Ambient Temperature:* 5°C to 40°C (41°F to 104°F)

*Relative Humidity:* 10% to 80%, non-condensing

**Max. Inlet Temperature:** 71°C (160°F)

**Sample Flow:** 50 to 200 sccm (150 sccm is recommended)

**Power Requirements:** 115 VAC, 60 Hz, 150 VA;  
230 VAC, 50 Hz, 150 VA

**Calibration Gas Requirements:** Use calibration gases @ 50 to 200 sccm (150 sccm is recommended)

*Zero Gas:* From 0.1 PPM to 10% O<sub>2</sub>, balance N<sub>2</sub>

*Span Gas:* One decade above zero gas (10 time greater) recommended

**Display:** Four line x 20 character vacuum fluorescent. Displays combinations of oxygen (0.1 PPM O<sub>2</sub> to 100%, autoranging), time and date, cell temperature, user programmable text, thermocouple mV, cell mV, flow, and pressure. Password protection and context-sensitive help are also provided.


**Analog Output:** Two isolated linear current outputs. Select O<sub>2</sub>, cell temperature, thermocouple mV or cell mV. Each output can be 4-20 mA, 0-20 mA, 20-4 mA or 20-0 mA, and is fully scalable. Hold or track during calibration and select degree of damping. Maximum load 1200 Ohms.

**Alarms:** Two independent alarms, each high or low selectable. Alarms can be assigned as oxygen, flow, calibrate or verify. Set relays to energize or deenergize on alarm.

**Contact Rating:** 0.5A, 30V, 10VA max. noninductive load

### NOTES:

1. All static performance characteristics are with operating variables constant.
2. System accuracy referenced to 0.1 to 10% calibrated range.
3. Response is to calibration gas.

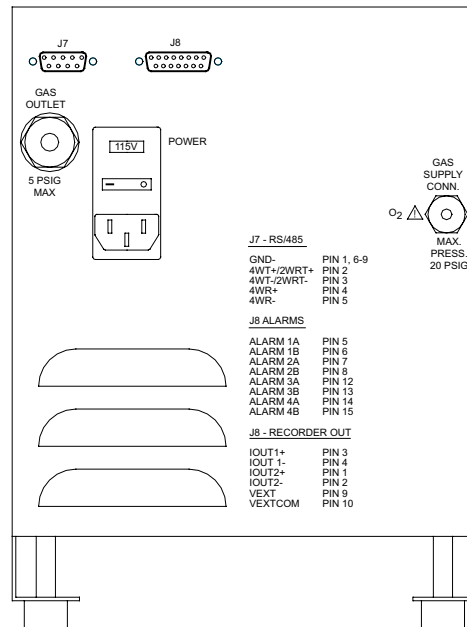

Rear Panel of CG1000 Analyzer

**Diagnostics:** Watchdog timer and service alarms. System test for A/D, RAM, EEPROM and keypad. Display line 4 reserved for full-text error and diagnostic messages. Twenty entry exception log for automatically detected system events.

**Communications:** RS-485, 2-way addressable

**Calibration:** Store last calibration and verification data. Selectable calibration gas run time and process recovery time. Oxygen cell lifetime extender. Calibrate or verify calibrations.

**Enclosure:** General Purpose.

**Dimensions (H x W x D):**

27.3 cm x 20.2 cm x 40.6 cm

(10.75 in. x 7.9 in. x 16 in.)

*Note: Pop-up feet raise analyzer another 3.2 cm (1.25")*

**Weight:** Approx. 19 lb (8.6 kg)

**System Compliance:**

EMC Directive 89/336/EEC

Low Voltage Directive 73/23/EEC

**AMETEK**<sup>®</sup>  
PROCESS INSTRUMENTS

150 Freeport Road, Pittsburgh, PA 15238  
Ph. +1-412-828-9040, Fax +1-412-826-0399  
www.ametekpi.com



© 2012, by AMETEK, Inc.  
All rights reserved. Printed in the U.S.A.  
F-0222 Rev. 3 (0112)

One of a family of innovative process analyzer solutions from AMETEK Process Instruments.  
Specifications subject to change without notice.

### SALES AND MANUFACTURING:

**CANADA - Alberta**  
2876 Sunridge Way N.E., Calgary, AB T1Y 7H9 • Tel: +1-403-235-8400, Fax: +1-403-248-3550

**USA - Delaware**  
455 Corporate Blvd., Newark DE 19702 • Tel: +1-302-456-4400, Fax: +1-302-456-4444

**USA - Oklahoma**  
2001 N. Indianwood Ave., Broken Arrow OK 74012 • Tel: +1-918-250-7200, Fax: +1-918-459-0165

### WORLDWIDE SALES AND SERVICE LOCATIONS:

**USA - Texas**  
Tel: +1-713-466-4900, Fax: +1-713-849-1924

**CHINA**  
Beijing / Tel: 86 10 8526 2111, Fax: 86 10 8526 2141  
Chengdu / Tel: 86 28 8675 8111, Fax: 86 28 8675 8141  
Guangzhou / Tel: 86 20 8363 4768, Fax: 86 20 8363 3701  
Shanghai / Tel: 86 21 5868 5111, Fax: 86 21 5866 0969

**FRANCE**  
Tel: 33 1 30 68 89 20, Fax: 33 1 30 68 89 29

**GERMANY**  
Tel: 49 21 59 91 36 0, Fax: 49 21 59 91 36 39

**INDIA**  
Tel: 91 80 6782 3200 Fax: 91 80 6782 3232

**SINGAPORE**  
Tel: 65 6484 2388, Fax: 65 6481 6588

Non-Combustion  
THERMOX