

Model 5100 Gas Analyzer for the Measurement of Moisture and Methane in Natural Gas

Based on Tunable Diode Laser Absorption Spectroscopy (TDLAS)



Model 5100 uses a sealed moisture reference cell for continuous on-line analyzer verification and offers high specificity, sensitivity and extremely fast response speeds.

Features and Benefits

- ▶ **Noncontact Measurement**
Noncontact measurement offers low maintenance
- ▶ **All Digital Signal Processing**
32-bit microcontroller capable of sophisticated signal processing
- ▶ **Web-Based Interface**
To interrogate the analyzer remotely, all you need is the IP address of the analyzer
- ▶ **Connectivity**
Modbus, Ethernet and analog
- ▶ **Real-Time Performance Monitoring**
Laser line-lock verification using internal reference cell
- ▶ **NEMA 4 Enclosure Houses the Electronic Components**
Designed for outdoor installation
- ▶ **Fully-Integrated Sample Handling**
Standard feature
- ▶ **Methane Measurement Option**
The 5100 can also be used to measure methane content in the range of 25%-100% with an accuracy typically of $\pm 3\%$ by volume.
- ▶ **Hazardous Area Certifications**
NEC/CEC: Class I, Div 2; Class II, Div 2, Groups F & G; Class III, Div 2
Div 1 and ATEX to Zone 1 are also available

Model 5100 Gas Analyzer

Specifications

Laser Specification: Class 1m

Operating Range:

0.25 - 60 lb/MMscf / 4 - 1900 mg/m³ (5 to 2500 ppmv moisture)

25%-100% methane (when option selected)

ppm and % measurements are also available

Accuracy:

Moisture: Typically 2% of reading or ±4 ppmv whichever is greater

Methane: ±3% by volume (when option selected)

Repeatability:

Moisture: Typically 2% of reading or ±4 ppmv whichever is greater

Methane: ±3% by volume (when option selected)

Environment:

Ambient Temperature:

-20°C to +50°C (-4°F to 122°F)

Electrical Classification:

NEC/CEC: Class I, Div 2; Class II, Div 2, Groups F & G; Class III, Div 2 (standard model)

Div 1 and ATEX to Zone 1 are also available

Relative Humidity:

0% to 90%, non-condensing

Sample Flow Rate:

1 to 10 SLPM recommended (2 - 20 SCFH)

Sample Cell Pressure:

70 to 170 kPa absolute (10-25 psia)

Speed of Response: < 1 second

photometric response. Total system response is dependent on sample flowrate.

Outputs:

4-line x 20-character alphanumeric VF display.

Fast Ethernet (IEEE802.3)

RS-485 serial port, isolated (supports Modicon Modbus RTU)

(1) assignable 0-20 mA output

(4) dry relay contacts. Contact rating 30 VAC, 60 VDC, 100 VA resistive

Electrical Requirements:

120 VAC (108-132V); 47-63 Hz, or

240 VAC (216-264V), 47-63 Hz

24 VDC - consult factory

Power Requirements:



< 25 W; with optional heater 105 W

Physical Dimensions (HxWxD):

86.88 cm x 43.42 cm x 21.17 cm (34.2 in. x 17.1 in. x 8.34 in.)

Weight: 25 Kg (55 lb)

Enclosure: IP-65, NEMA 4

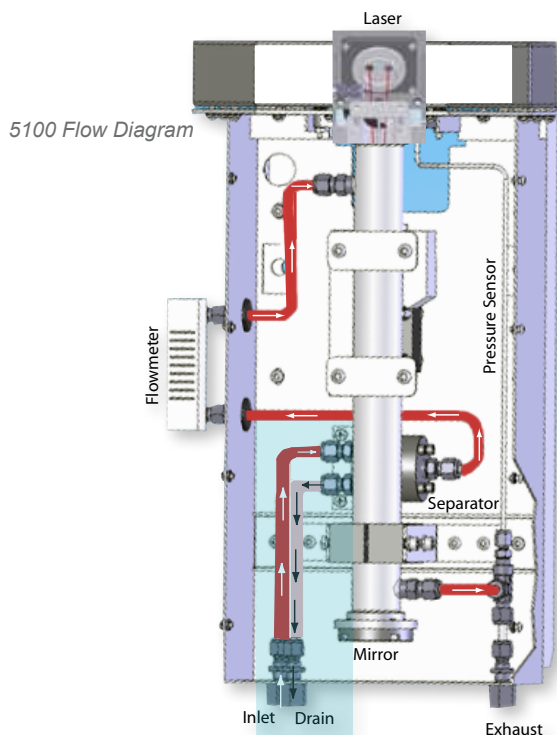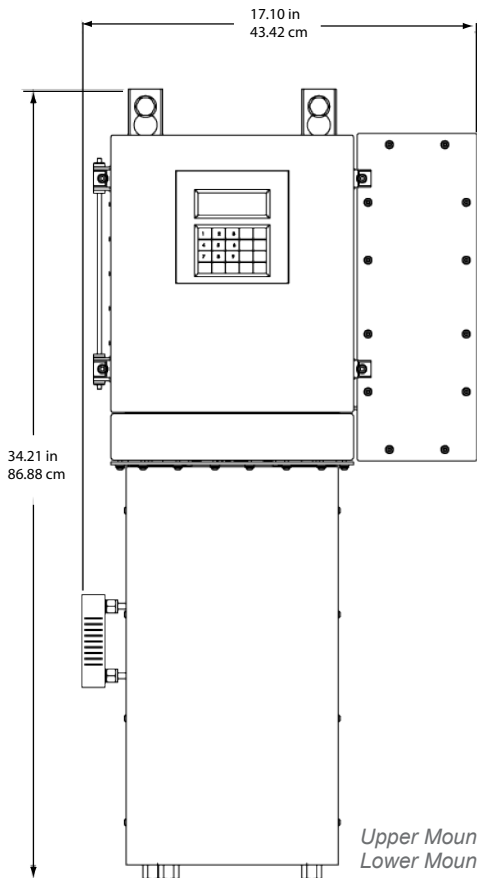

Upper Mounting Hardware: (2) 1/2" x 1.00 L (M6 x 25 mm L) hex bolts
Lower Mounting Hardware: (2) 1/2" x 2.50 L (M6 x 60 mm L) hex bolts (Optional)



150 Freeport Road, Pittsburgh, PA 15238
Ph. +1-412-828-9040, Fax +1-422-826-0399
www.ametekpi.com



© 2011, by AMETEK, Inc.
All rights reserved. Printed in the U.S.A.
F-0216 Rev. 3 (0511)

One of a family of innovative process analyzer solutions from AMETEK Process Instruments.
Specifications subject to change without notice.

SALES AND MANUFACTURING:

USA - Delaware
455 Corporate Blvd., Newark DE 19702 • Tel: +1-302-456-4400, Fax: +1-302-456-4444

USA - Oklahoma
2001 N. Indianwood Ave., Broken Arrow OK 74012 • Tel: +1-918-250-7200, Fax: +1-918-459-0165

CANADA - Alberta
2876 Sunridge Way N.E., Calgary, AB T1Y 7H9 • Tel: +1-403-235-8400, Fax: +1-403-248-3550

WORLDWIDE SALES AND SERVICE LOCATIONS:

USA - Texas
Tel: +1-713-466-4900, Fax: +1-713-849-1924

CHINA
Beijing / Tel: 86 10 8526 2111, Fax: 86 10 8526 2141
Chengdu / Tel: 86 28 8675 8111, Fax: 86 28 8675 8141
Guangzhou / Tel: 86 20 8363 4768, Fax: 86 20 8363 3701
Shanghai / Tel: 86 21 5868 5111, Fax: 86 21 5866 0969

FRANCE
Tel: 33 1 30 68 89 20, Fax: 33 1 30 68 89 29

GERMANY
Tel: 49 21 59 91 36 0, Fax: 49 21 59 91 36 39

INDIA
Tel: 91 80 6782 3200, Fax: 91 80 6782 3232

SINGAPORE
Tel: 65 6484 2388, Fax: 65 6481 6588

TDLAS