

Reduce NOx Emissions while Improving Fuel Efficiency



ThermoX WDG-V analyzer helps you to optimize combustion efficiency and minimize NOx emissions.

- || NOx emissions are subject to regulatory controls in many parts of the world.
- || You can minimize NOx emissions by monitoring oxygen and combustibles using a flue gas analyzer.
- || A high temperature sample point close to the flame source eliminates errors on the oxygen measurement from tramp air leakage.
- || With the ThermoX WDG-V analyzer, you can reduce NOx while improving fuel efficiency.

One of the easiest and most cost-effective ways to reduce NOx and improve fuel efficiency is to measure oxygen and combustibles.

NOx emissions from combustion sources contribute to the formation of ground-level ozone and fine particles. For this reason, most countries have regulations limiting the amount of NOx which can be emitted from combustion plants. In the USA, the Transport Rule establishes a strict program for NOx reductions in many areas. This makes NOx control an important consideration for plant operators.

What is NOx?

In a combustion process, fuel is burned in air to produce heat. Nitrogen and oxygen molecules from the air dissociate to their atomic forms at the high temperatures typically found in flames. These produce NO as they react with the remaining air molecules. The dissociation takes place mainly at temperatures above 1600°C (2900°F).

How to Limit NOx Emissions

One of the easiest and most cost-effective ways to limit NOx emissions is to limit the amount of available oxygen, which can combine with nitrogen to form NO.

Because the mixing of air and fuel can never be perfect, some excess air is required to ensure complete combustion. If too little excess air is available, the combustibles in the flue gas rise dramatically. Knowing the oxygen and combustibles concentrations in the flue gas allows the amount of excess air to be controlled while maintaining good combustion efficiency. The optimum control point to minimize NOx emissions and efficiency losses is shown in Figure 1.

The optimum operating point depends on load conditions, age of equipment, fuel type and process conditions. By continuously monitoring the amount of oxygen and combustibles in the flue gas, prompt adjustments can be made to maintain optimum burner conditions.

When relying on an O₂ and combustibles measurement to control combustion efficiency and minimize NOx, the analyzer needs to be placed as close to the combustion process as practical. Tramp air leakage downstream from the combustion process can cause the analyzer to read incorrectly. Also, the closer to the process the analyzer is placed, the faster the analyzer will respond to changing conditions.

Thermox Flue Gas Analyzers

The Thermox model WDG-V monitors both oxygen and combustibles in flue gases. Oxygen is measured using zirconium oxide sensor technology. Combustibles in the flue gas are detected using a catalytic sensor. This flue gas analyzer can be placed close to the flame source (1648°C), thus eliminating tramp air leakage effects on oxygen readings.

The WDG-V sets the standard for fast and accurate response in a flue gas analyzer and is ideal for light oils and gas applications. The analyzer can be used with either the AME Vision Display User Interface or the PC configuration software. The controllers provide analog outputs, alarm contacts and an RS-485 interface, which can be integrated into your overall boiler and NOx control system.

COMBUSTION EFFICIENCY

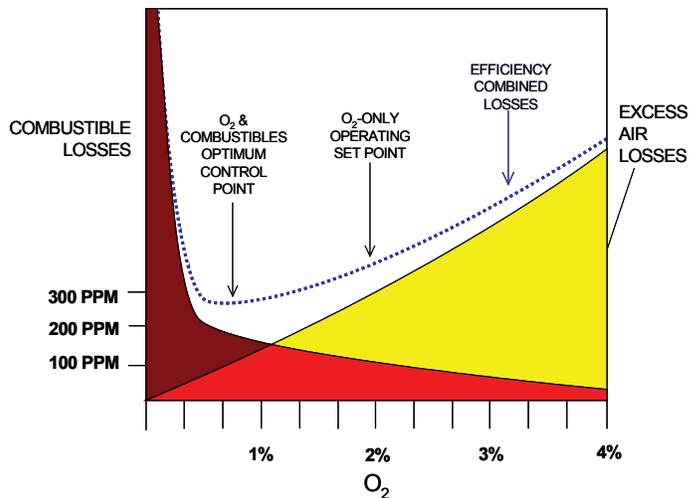


Figure 1. Combustibles vs. Excess Oxygen showing efficiency losses (this figure for illustration purposes only).



150 Freeport Road, Pittsburgh, PA 15238
 Ph. +1-412-828-9040, Fax +1-412-826-0399
 www.ametekpi.com



© 2016, by AMETEK, Inc.
 All rights reserved. Printed in the U.S.A.
 F-0435 Rev. 2 (0416)

One of a family of innovative process analyzer solutions from AMETEK Process Instruments.
 Specifications subject to change without notice.

SALES, SERVICE AND MANUFACTURING:

USA - Pennsylvania
 150 Freeport Road, Pittsburgh PA 15238 • Tel: +1-412-828-9040, Fax: +1-412-826-0399

USA - Delaware
 455 Corporate Blvd., Newark DE 19702 • Tel: +1-302-456-4400, Fax: +1-302-456-4444

Canada - Alberta
 2876 Sunridge Way N.E., Calgary AB T1Y 7H2 • Tel: +1-403-235-8400, Fax: +1-403-248-3550

WORLDWIDE SALES AND SERVICE LOCATIONS:

USA - Houston, Texas
 Tel: +1-713-466-4900, Fax: +1-713-849-1924

BRAZIL
 Tel: +55 19 2107 4100

CHINA
 Beijing / Tel: +86 10 8526 2111, Fax: +86 10 8526 2141
 Chengdu / Tel: +86 28 8675 8111, Fax: +86 28-8675 8141
 Shanghai / Tel: +86 21 6426 8111, Fax: +86 21 6426 7818

FRANCE
 Tel: +33 1 30 68 89 20, Fax: +33 1 30 68 89 99

GERMANY
 Tel: +49 21 59 91 36 0, Fax: +49 21 59 91 3639

INDIA
 Tel: +91 80 6782 3200, Fax: +91 80 6782 3232

SINGAPORE
 Tel: +65 6484 2388, Fax: +65 6481 6588